

WILLIAMS

DESIGNED FOR ALL TYPES OF
POWER IMPACT WRENCHES

EXTRA-TOUGH ALLOY STEEL
SPECIALLY HEAT-TREATED

7 SQUARE DRIVE SIZES
OVER 100 SOCKETS

IMPACT "SUPERSOCKETS"



WILLIAMS' IMPACT "SUPERSOCKETS" ARE USED WITH ALL TYPES OF POWER IMPACT WRENCHES. MADE TO EXACTING SPECIFICATIONS TO MEET ALL THE SPECIAL REQUIREMENTS FOUND IN IMPACT WORK, THEY ALSO DELIVER SUPERIOR PERFORMANCE WHEN USED WITH POWER NUT RUNNERS.

IMPACT

"SUPERSOCKETS"

FOR USE WITH ALL TYPES OF POWER IMPACT WRENCHES


Williams' Impact "Supersockets" are adaptable to all socket locking methods used on the various types and makes of power impact wrenches. Accurate fit and precision machining assure long life and safe, dependable service.

MADE OF EXTRA-TOUGH ALLOY STEEL SPECIALLY HEAT-TREATED

They withstand the constant shock and pounding involved in electric and pneumatic impact nut setting or power nut running. Performance in strength and toughness is far beyond that found in ordinary power sockets.

7 SQUARE DRIVE SIZES — OVER 100 SOCKETS HEX OPENINGS 3/16" TO 3-1/2"

Impact "Supersockets" offer a wide selection for all types of impact work found in manufacturing plants, shipyards, locomotive and railroad shops, automotive service and assembly work etc.

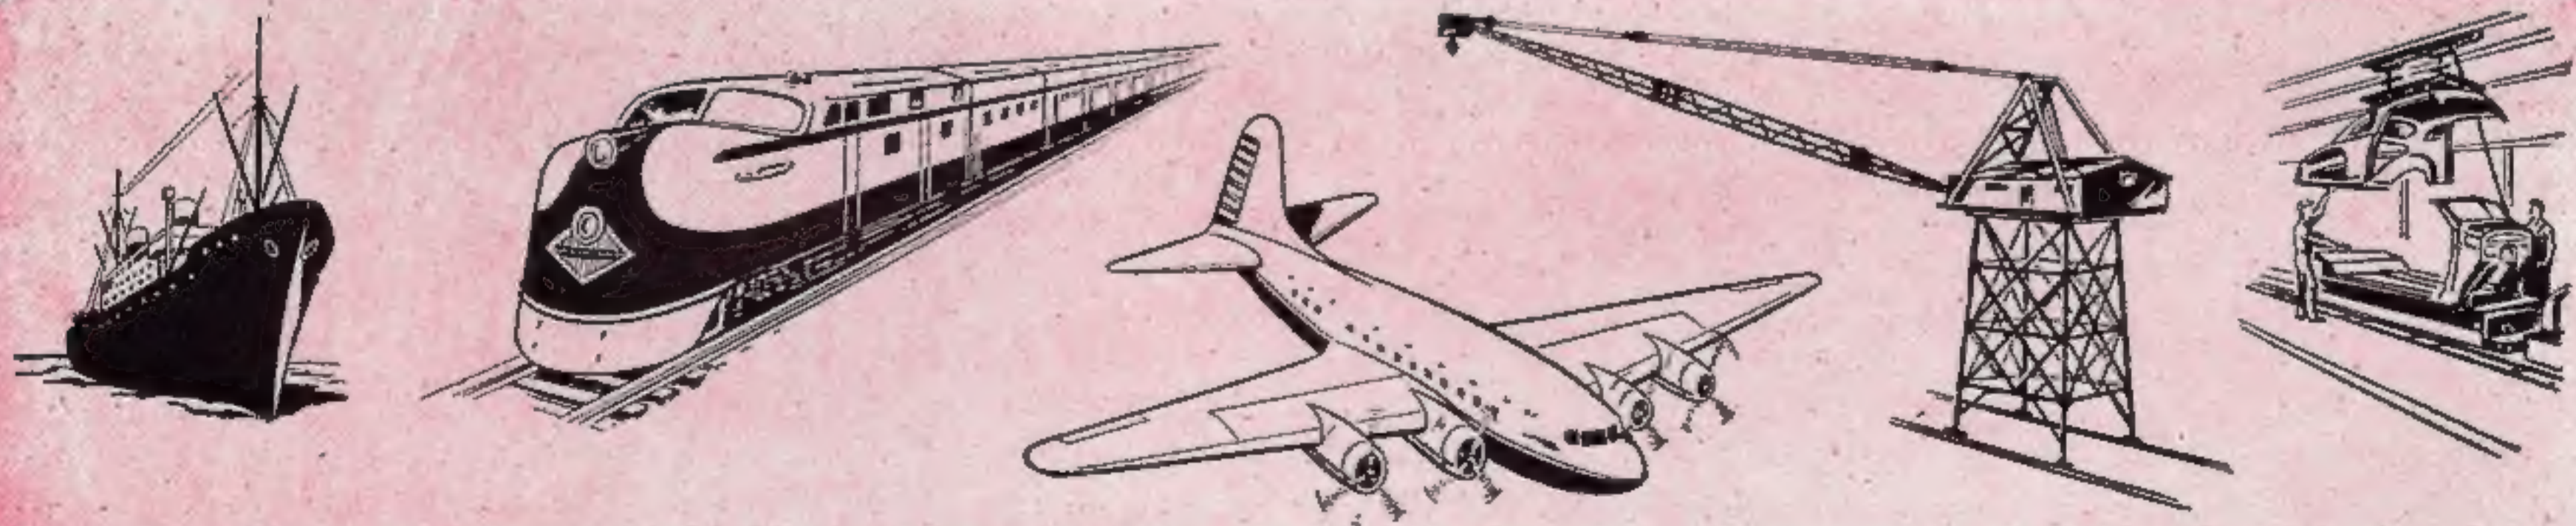


WILLIAMS


IMPACT

"SUPERSOCKETS"

"O" SERIES
Standard Length Hexagon
1/4" Square Drive

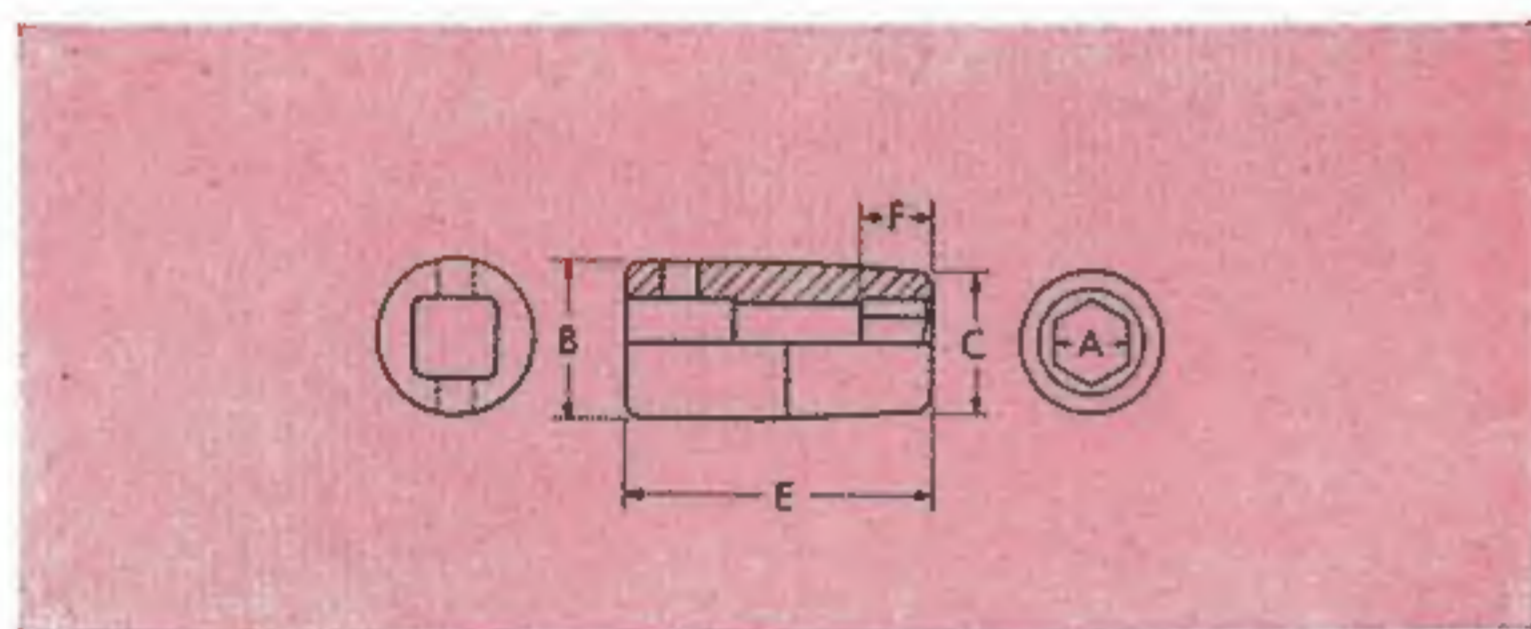

TYPE A

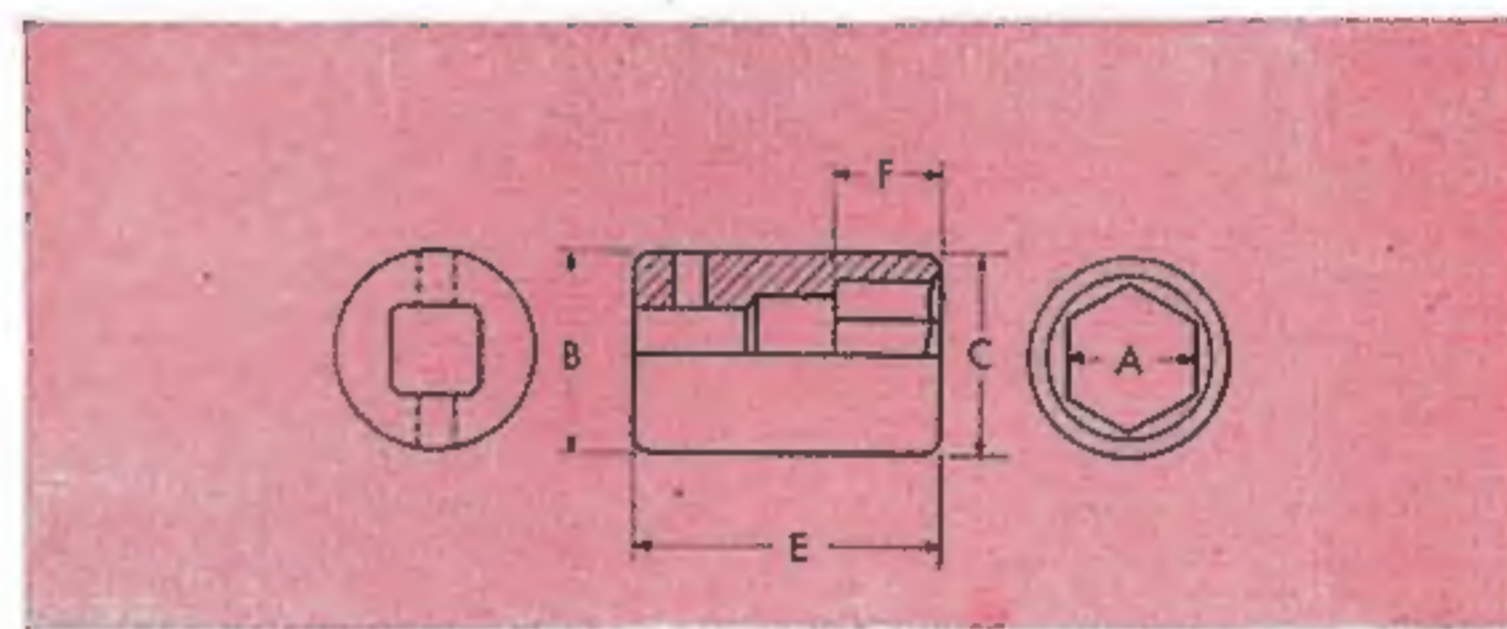

TYPE B



0-102



0-106

0-102 Extension Bar — 2" long — List Price, **\$1.00**

0-106 Extension Bar — 6" long — List Price, **\$1.20**


Nominal Opening	FOR HEX NUTS AND CAP SCREWS						Type	DIMENSIONS				
	No.	List Price Each	Amer. Std. HEAVY Nut (U.S.S.) Size Bolt	Amer. Std. Hex Head Cap Screw Diam. Screw	Amer. Std. LIGHT Nut (S.A.E.) Size Bolt	Amer. Std. Machine Screw Hex Nut		Nominal Opening A	Diam. Drive End B	Diam. Nose C	Length Overall E	Depth Nominal Opening F
3/16	0-606	\$.45	Nos. 2 & 3	A	3/16	7/16	23/64	7/8	3/16
7/32	0-607	.45	A	7/32	7/16	13/32	7/8	13/64
1/4	0-608	.45	No. 4	B	1/4	7/16	7/16	7/8	7/32
9/32	0-609	.45	A	9/32	1/2	15/32	7/8	15/64
5/16	0-610	.45	1/8	1/8	Nos. 5 & 6	B	5/16	1/2	1/2	7/8	1/4
11/32	0-611	.45	No. 8	B	11/32	1/2	1/2	7/8	9/32
3/8	0-612	.45	3/16	No. 10	B	3/8	9/16	9/16	7/8	5/16
7/16	0-614	.45	1/4	1/4	1/4&No.12	B	7/16	5/8	5/8	7/8	5/16

WILLIAMS


IMPACT "SUPERSOCKETS"

"2" SERIES

Standard Length Hexagon
3/8" Square Drive

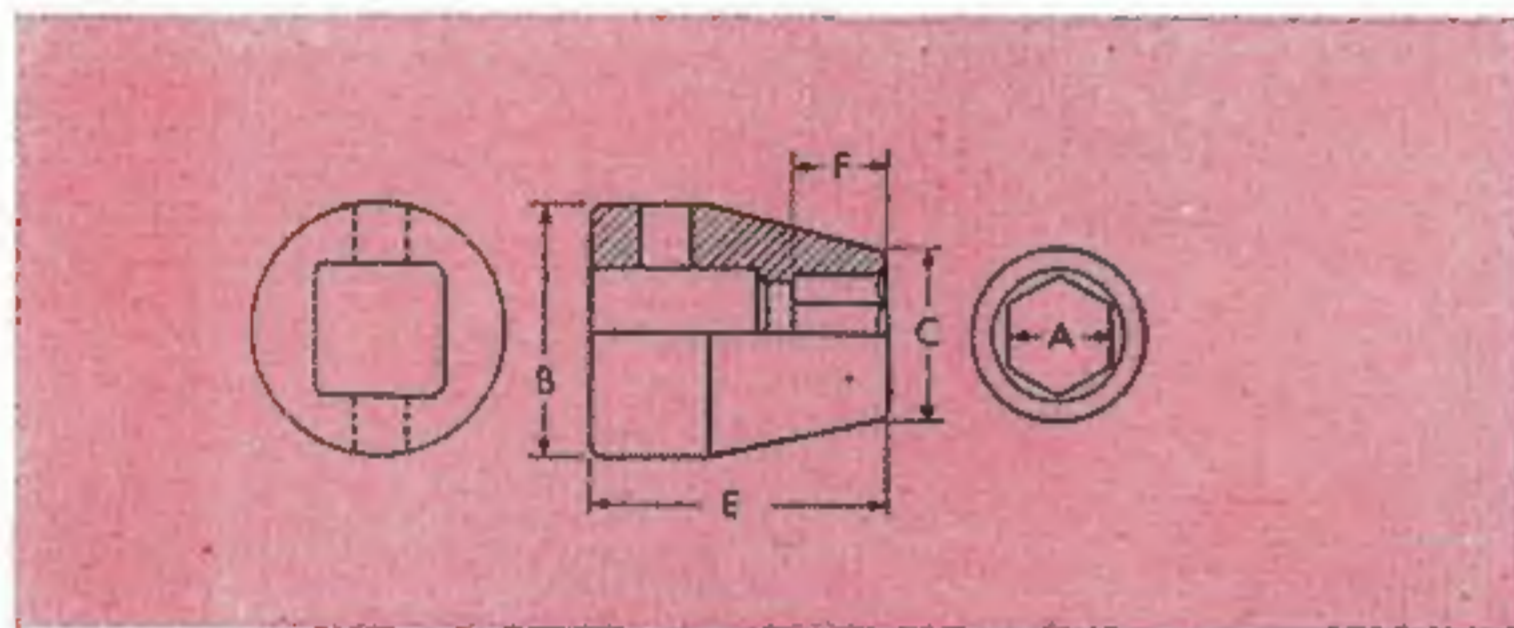

TYPE A

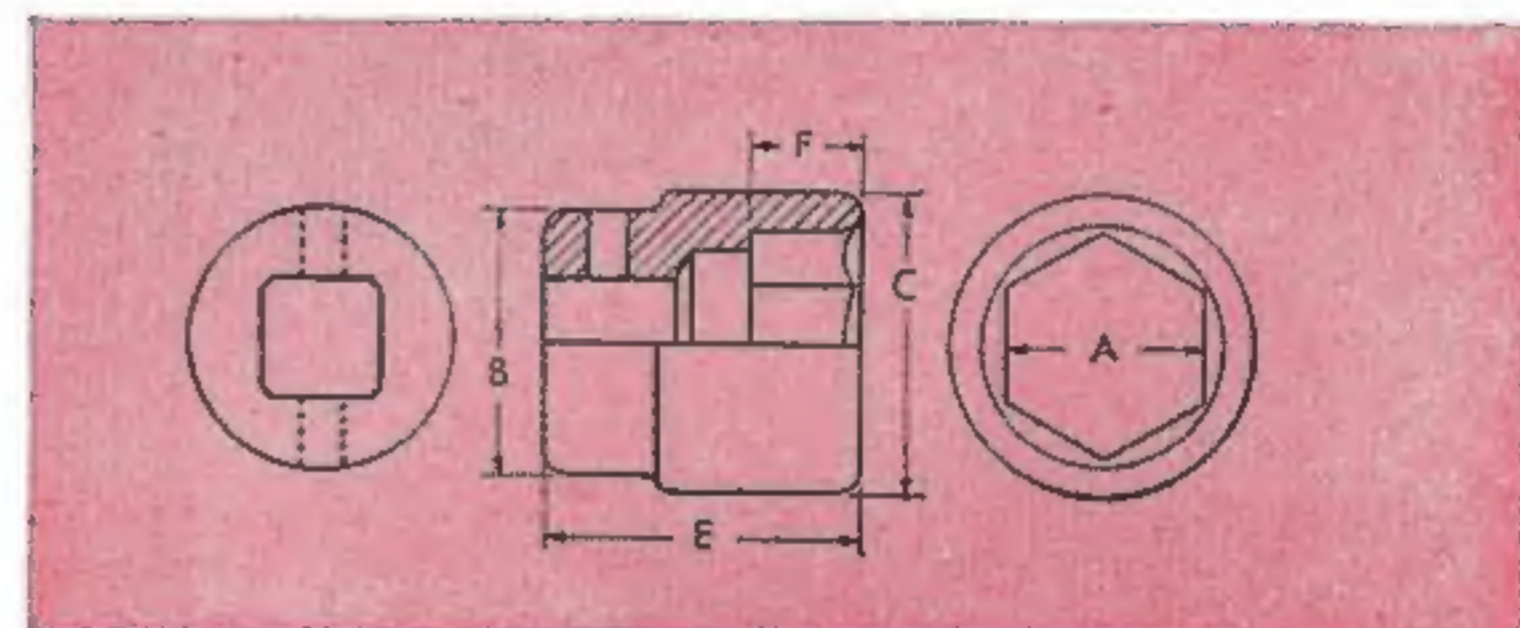

TYPE B



2-103



2-106

2-103 Extension Bar — 3" long — List Price, \$1.10

2-106 Extension Bar — 6" long — List Price, \$1.30

Nominal Opening	FOR HEX NUTS AND CAP SCREWS						Type	DIMENSIONS				
	No.	List Price Each	Amer. Std. HEAVY Nut (U.S.S.) Size Bolt	Amer. Std. Hex Head Cap Screw Diam. Screw	Amer. Std. LIGHT Nut (S.A.E.) Size Bolt	Amer. Std. REGULAR Nut; Size Bolt		Nominal Opening A	Diam Drive End B	Diam. Nose C	Length Overall E	Depth Nominal Opening F
5/16	2-610	\$.55	1/8	1/8	*Nos. 5 & 6	A	5/16	3/4	1/2	7/8	9/32
11/32	2-611	.55	*No. 8	A	11/32	3/4	17/32	7/8	9/32
3/8	2-612	.55	3/16	*No. 10	A	3/8	3/4	9/16	7/8	9/32
7/16	2-614	.55	1/4	1/4	1/4 & *No. 12	A	7/16	3/4	21/32	7/8	9/32
1/2	2-616	.55	1/4	5/16	5/16	B	1/2	3/4	3/4	15/16	5/16
9/16	2-618	.55	3/8	3/8	5/16	A	9/16	7/8	13/16	1	3/8
19/32	2-619	.60	5/16	A	19/32	7/8	27/32	1	3/8
5/8	2-620	.60	7/16	7/16	3/8	B	5/8	7/8	57/64	1	13/32
11/16	2-622	.60	3/8	B	11/16	7/8	31/32	1-1/8	7/16
3/4	2-624	.60	1/2	1/2	7/16	B	3/4	7/8	1-1/16	1-1/8	7/16


*Amer. Std. Machine-Screw and Stove-Bolt Nuts.

WILLIAMS


IMPACT

"SUPERSOCKETS"

"4" SERIES
Standard Length Hexagon
1/2" Square Drive

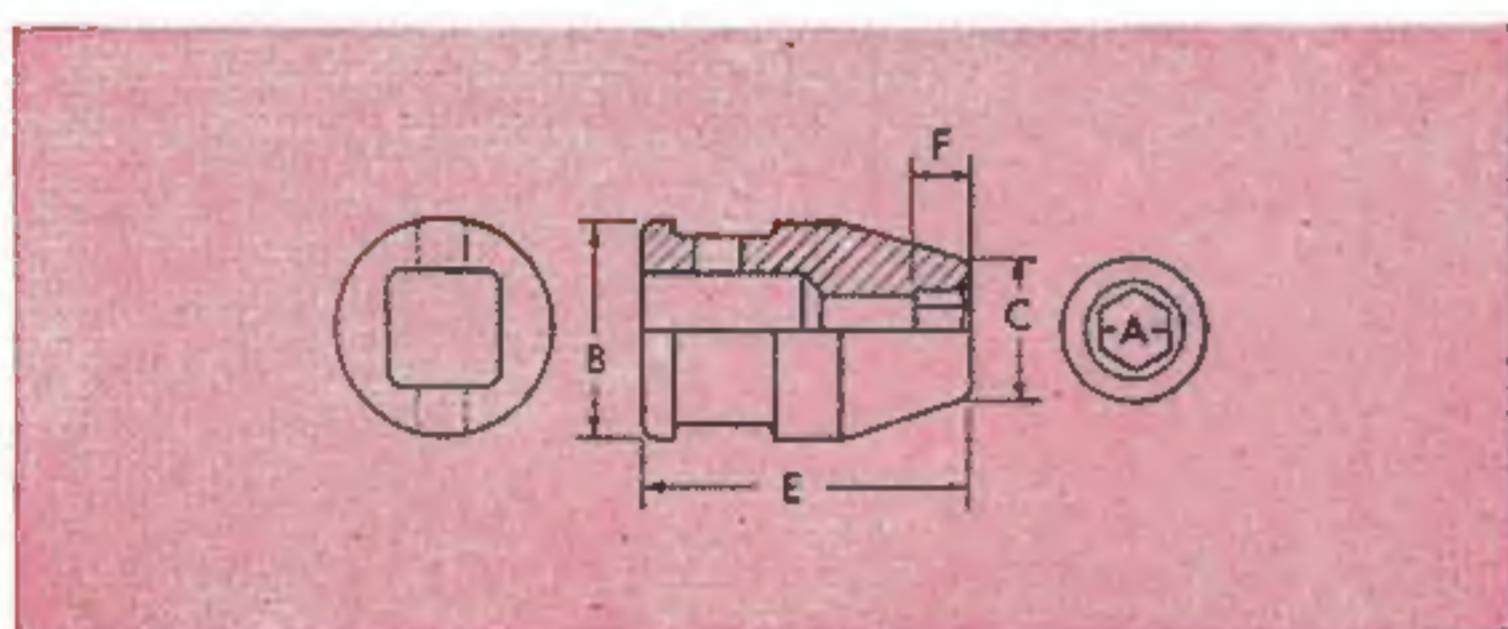

TYPE A

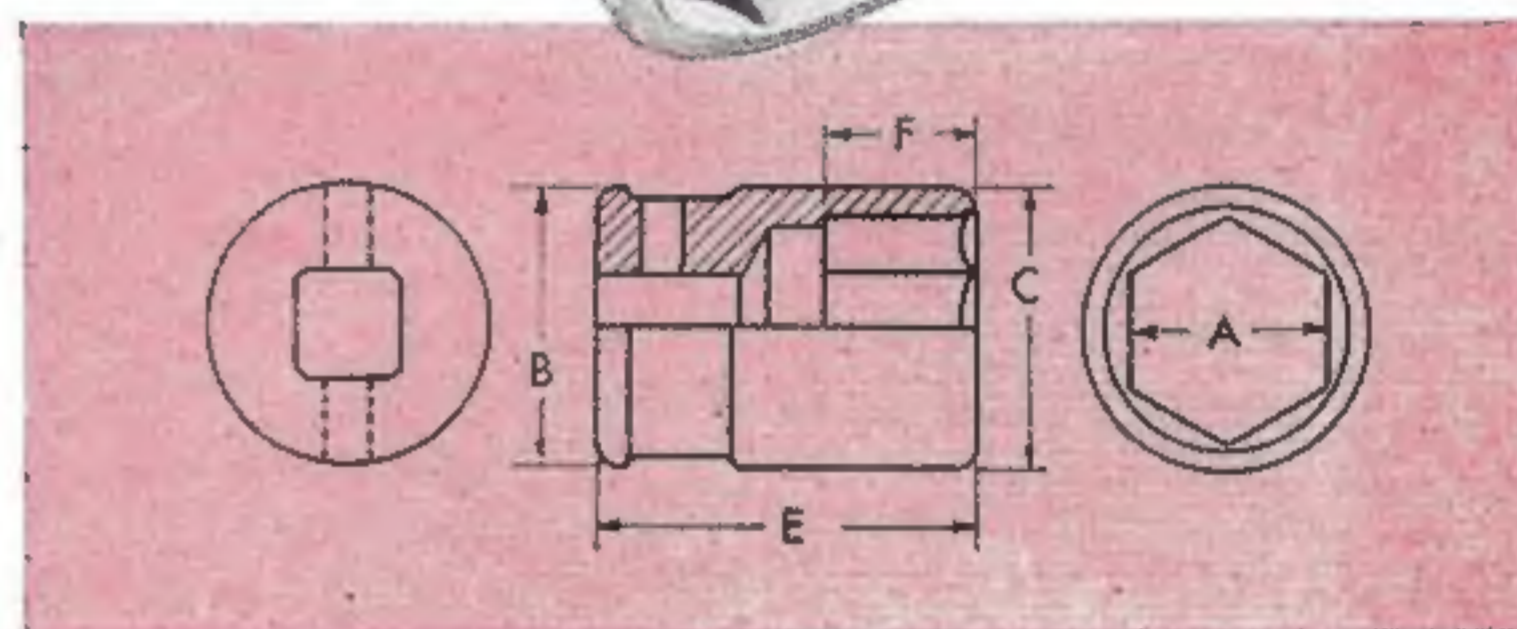

TYPE B



4-105

4-110

4-105 Extension Bar — 5" long — List Price, \$1.40

4-110 Extension Bar — 10" long — List Price, \$1.60

Nominal Opening	FOR HEX NUTS AND CAP SCREWS						Type	DIMENSIONS				
	No.	List Price Each	Amer. Std. HEAVY Nut (U.S.S.) Size Bolt	Amer. Std. Hex Head Cap Screw Diam. Screw	Amer. Std. LIGHT Nut (S.A.E.) Size Bolt	Amer. Std. REGULAR Nut; Size Bolt		Nominal Opening A	Diam. Drive End B	Diam. Nose C	Length Overall E	Depth Nominal Opening F
3/8	4-612	\$.65	3/16	*No. 10	A	3/8	1	5/8	1-1/2	9/32
7/16	4-614	.65	1/4	1/4	1/4 & *No.12	A	7/16	1	45/64	1-1/2	21/64
1/2	4-616	.65	1/4	5/16	5/16	A	1/2	1-1/16	25/32	1-1/2	3/8
9/16	4-618	.65	3/8	3/8	5/16	A	9/16	1-1/16	7/8	1-1/2	7/16
19/32	4-619	.65	5/16	A	19/32	1-1/16	29/32	1-1/2	7/16
5/8	4-620	.65	7/16	7/16	3/8	A	5/8	1-1/8	61/64	1-1/2	15/32
11/16	4-622	.70	3/8	A	11/16	1-1/8	1-1/32	1-1/2	33/64
3/4	4-624	.75	1/2	1/2	7/16	B	3/4	1-1/8	1-1/8	1-1/2	9/16
25/32	4-625	.80	7/16	B	25/32	1-1/8	1-9/64	1-1/2	19/32
13/16	4-626	.85	9/16	1/2	B	13/16	1-1/8	1-3/16	1-1/2	39/64
7/8	4-628	.85	1/2	5/8	9/16	9/16	B	7/8	1-1/8	1-5/16	1-5/8	21/32
15/16	4-630	.95	5/8	B	15/16	1-5/16	1-3/8	1-3/4	45/64
1	4-632	1.00	3/4	5/8	B	1	1-5/16	1-7/16	1-3/4	3/4
1-1/16	4-634	1.10	5/8	3/4	B	1-1/16	1-5/16	1-33/64	2	51/64
1-1/8	4-636	1.20	7/8	3/4	B	1-1/8	1-5/16	1-39/64	2	27/32
1-1/4	4-640	1.30	3/4	† (1)	7/8	B	1-1/4	1-5/16	1-49/64	2	15/16

† Old style cap screw—now obsolete. *Amer. Std. Machine-Screw and Stove-Bolt Nuts.


For Retainer Pins and Neoprene Bands for sockets and extensions see Page 11.

WILLIAMS


IMPACT

"SUPERSOCKETS"

"5" SERIES
Standard Length Hexagon
5/8" Square Drive

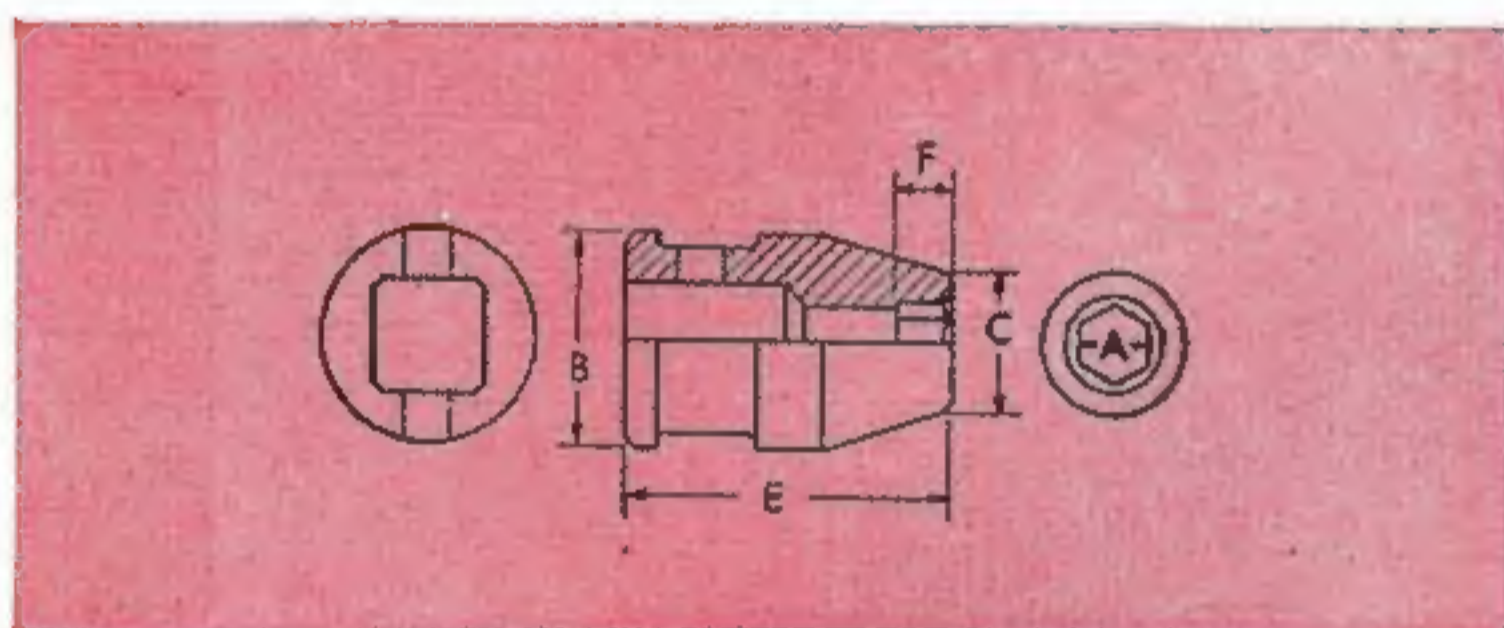

TYPE A

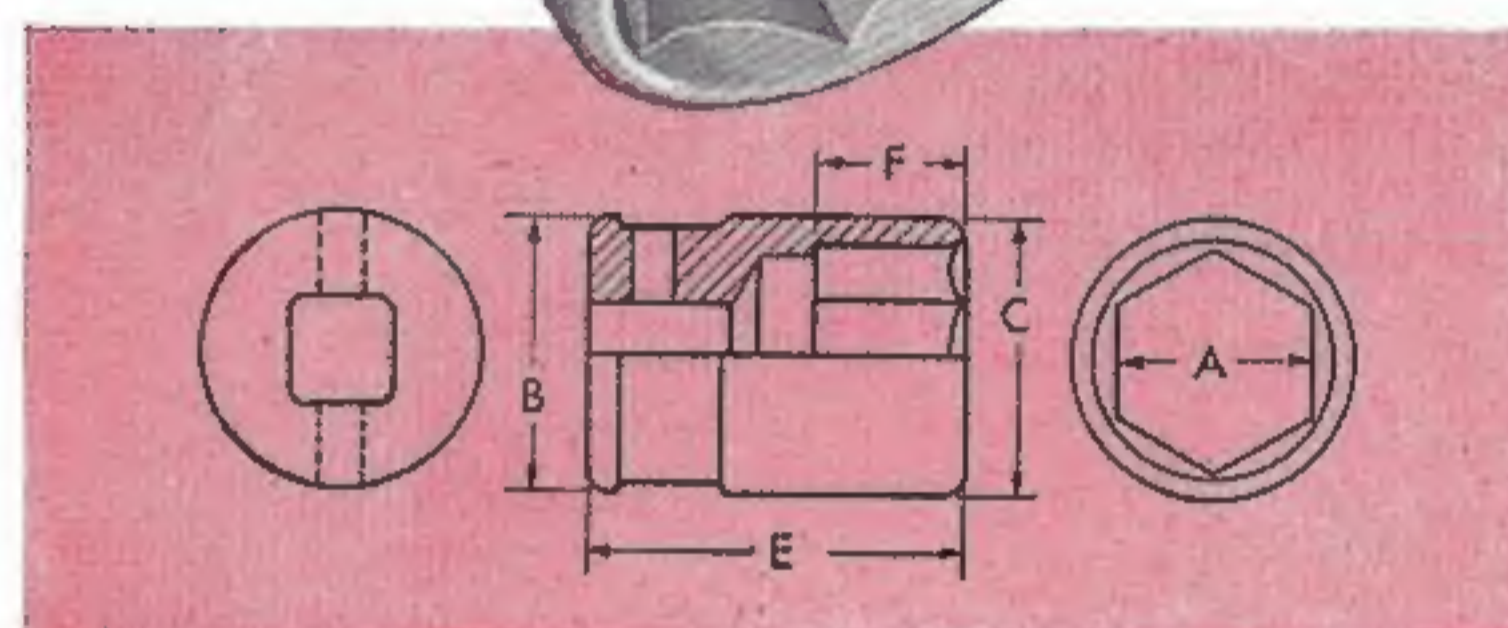

TYPE B



5-106



5-110

5-106 Extension Bar — 6" long — List Price, **\$2.00**

5-110 Extension Bar — 10" long — List Price, **\$2.50**

Nominal Opening	FOR HEX NUTS AND CAP SCREWS						Type	DIMENSIONS				
	No.	List Price Each	Amer. Std. HEAVY Nut (U.S.S.) Size Bolt	Amer. Std. Hex Head Cap Screw Diam. Screw	Amer. Std. LIGHT Nut (S.A.E.) Size Bolt	Amer. Std. REGULAR Nut; Size Bolt		Nominal Opening A	Diam. Drive End B	Diam. Nose C	Length Overall E	Depth Nominal Opening F
1/2	5-616	\$1.00	1/4	5/16	5/16	A	1/2	1-5/16	7/8	1-1/2	7/16
9/16	5-618	1.00	3/8	3/8	5/16	A	9/16	1-5/16	15/16	1-1/2	7/16
*19/32	5-619	1.00	5/16	A	19/32	1-1/8	57/64	1-1/2	7/16
5/8	5-620	1.00	7/16	7/16	3/8	A	5/8	1-5/16	1- 1/64	1-1/2	15/32
11/16	5-622	1.00	3/8	A	11/16	1-5/16	1- 7/64	1-1/2	1/2
3/4	5-624	1.00	1/2	1/2	7/16	A	3/4	1-5/16	1- 3/16	1-1/2	9/16
25/32	5-625	1.00	7/16	A	25/32	1-5/16	1-15/64	1-1/2	19/32
13/16	5-626	1.00	9/16	1/2	A	13/16	1-5/16	1-17/64	1-1/2	5/8
7/8	5-628	1.00	1/2	5/8	9/16	9/16	B	7/8	1-5/16	1- 3/8	1-5/8	21/32
15/16	5-630	1.15	5/8	B	15/16	1-5/16	1- 7/16	1-3/4	11/16
1	5-632	1.25	3/4	5/8	B	1	1-1/2	1- 1/2	1-3/4	3/4
1-1/16	5-634	1.35	5/8	3/4	B	1-1/16	1-1/2	1- 5/8	2	13/16
1-1/8	5-636	1.40	7/8	3/4	B	1-1/8	1-1/2	1-11/16	2	13/16
1-1/4	5-640	1.55	3/4	† (1)	7/8	B	1-1/4	1-1/2	1-13/16	2	7/8
1-5/16	5-642	1.65	1	7/8	B	1-5/16	1-1/2	1-15/16	2-1/8	1- 1/16
1-3/8	5-644	1.80	† (1-1/8)	B	1-3/8	1-1/2	2	2-1/8	1- 1/16
1-7/16	5-646	1.95	7/8	1	B	1-7/16	1-1/2	2- 1/16	2-1/4	1-11/64
1-1/2	5-648	2.15	1-1/8†(1-1/4)	1	B	1-1/2	1-1/2	2- 5/32	2-3/8	1-19/64

† Old style cap screw—now obsolete. *Straight Wall, no band groove.

For Retainer Pins and Neoprene Bands for sockets and extensions see Page 11.

WILLIAMS


IMPACT

"SUPERSOCKETS"


"6" SERIES

Standard Length Hexagon
3/4" Square Drive

Furnished with removable
snap-ring in drive end.

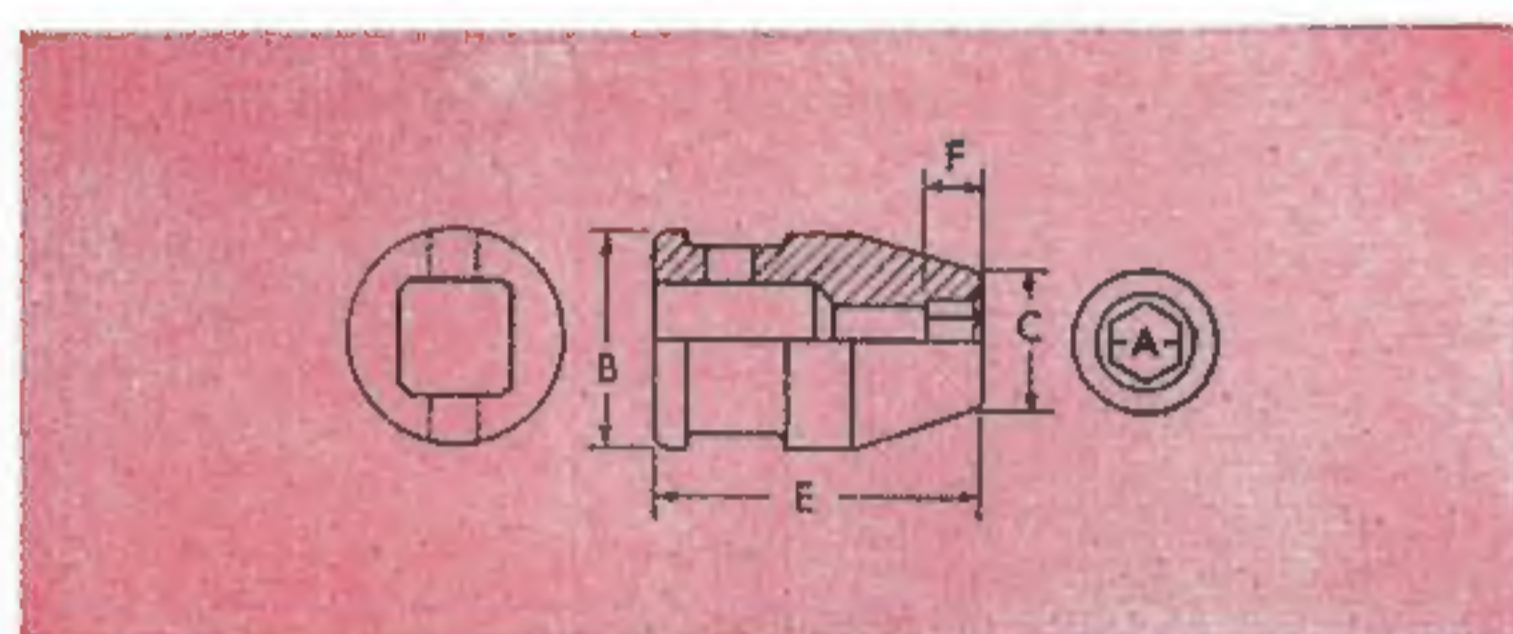

TYPE A

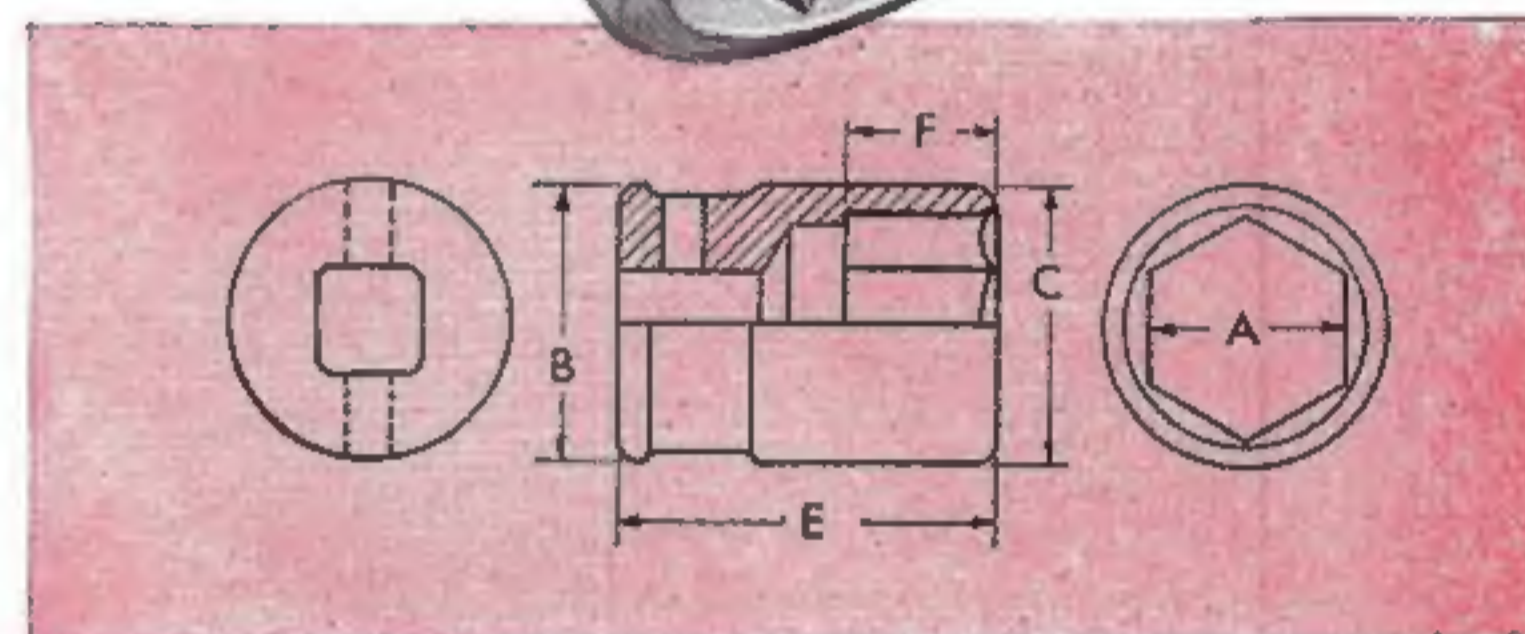

TYPE B



6-107



6-110



6-113

6-107 Extension Bar — 7" long — List Price, \$5.00
6-110 Extension Bar — 10" long — List Price, \$6.00
6-113 Extension Bar — 13" long — List Price, \$6.50

Nominal Opening	FOR HEX NUTS AND CAP SCREWS						Type	DIMENSIONS				
	No.	List Price Each	Amer. Std. HEAVY Nut (U.S.S.) Size Bolt	Amer. Std. Hex Head Cap Screw Diam. Screw	Amer. Std. LIGHT Nut (S.A.E.) Size Bolt	Amer. Std. REGULAR Nut; Size Bolt		Nominal Opening A	Diam. Drive End B	Diam. Nose C	Length Overall E	Depth Nominal Opening F
9/16	6-618	\$2.30	3/8	3/8	5/16	A	9/16	1-1/2	1	1-3/4	9/16
19/32	6-619	2.30	5/16	A	19/32	1-1/2	1- 1/16	1-3/4	9/16
5/8	6-620	2.30	7/16	7/16	3/8	A	5/8	1-1/2	1- 3/32	1-3/4	9/16
11/16	6-622	2.30	3/8	A	11/16	1-1/2	1- 5/32	1-3/4	9/16
3/4	6-624	2.30	1/2	1/2	7/16	A	3/4	1-1/2	1- 1/4	1-3/4	9/16
25/32	6-625	2.30	7/16	A	25/32	1-1/2	1- 9/32	1-3/4	9/16
13/16	6-626	2.30	9/16	1/2	A	13/16	1-1/2	1- 3/8	1-7/8	5/8
7/8	6-628	2.30	1/2	5/8	9/16	9/16	B	7/8	1-1/2	1- 1/2	1-7/8	5/8
15/16	6-630	2.40	5/8	B	15/16	1-1/2	1- 9/16	1-7/8	5/8
1	6-632	2.45	3/4	5/8	B	1	1-1/2	1- 5/8	2	3/4
1- 1/16	6-634	2.55	5/8	3/4	B	1- 1/16	1-1/2	1-11/16	2	3/4
1- 1/8	6-636	2.60	7/8	3/4	B	1- 1/8	1-1/2	1- 3/4	2-1/8	7/8
1- 1/4	6-640	3.00	3/4	† (1)	7/8	B	1- 1/4	1-3/4	2	2-1/8	7/8
1- 5/16	6-642	3.40	1	7/8	B	1- 5/16	1-3/4	2- 1/16	2-1/4	1
1- 3/8	6-644	3.60	† (1-1/8)	B	1- 3/8	1-3/4	2- 1/8	2-1/4	1
1- 7/16	6-646	3.85	7/8	1	B	1- 7/16	1-3/4	2- 1/4	2-1/4	1
1- 1/2	6-648	4.00	1-1/8 †(1-1/4)	1	B	1- 1/2	1-3/4	2- 5/16	2-3/8	1-1/8
1- 5/8	6-652	4.25	1	1-1/8	B	1- 5/8	1-7/8	2- 7/16	2-3/8	1-1/8
1-11/16	6-654	4.40	1-1/4	1-1/8	B	1-11/16	1-7/8	2- 1/2	2-3/8	1-1/8

† Old style cap screw—now obsolete.

For Retainer Pins and Neoprene Bands for sockets and extensions see Page 11.

WILLIAMS

IMPACT


"SUPERSOCKETS"

"7" SERIES


Standard Length Hexagon

1" Square Drive

Furnished with removable
snap-ring in drive end

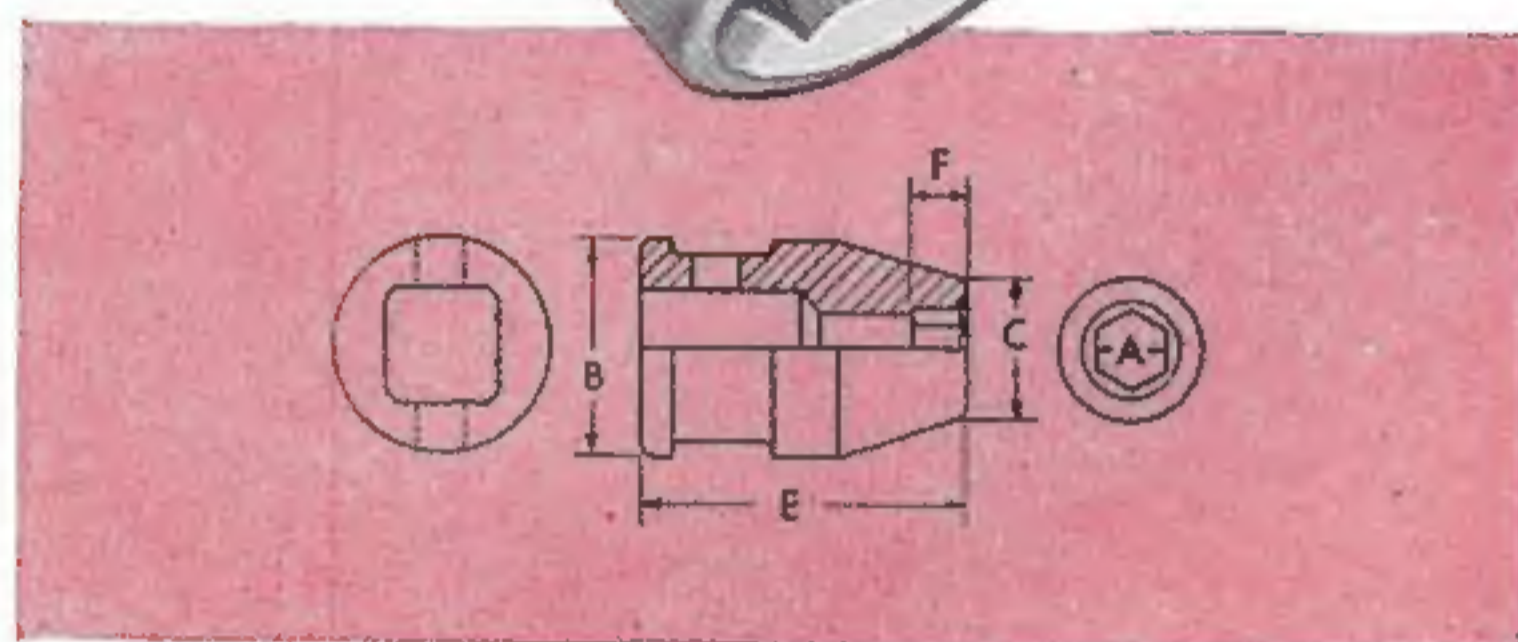

TYPE A

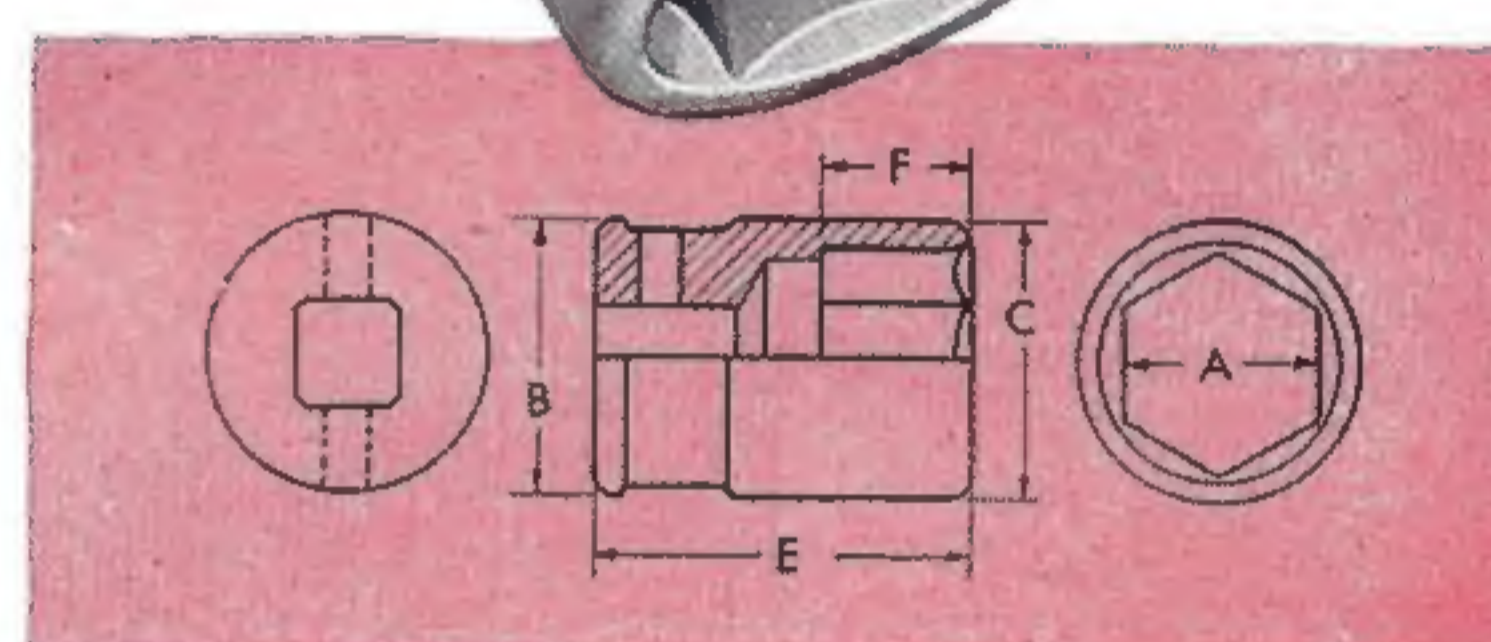

TYPE B



7-106



7-112

7-106 Extension Bar — 6" long — List Price, \$ 8.00

7-112 Extension Bar — 12" long — List Price, \$10.00

Nominal Opening	FOR HEX NUTS AND CAP SCREWS						Type	DIMENSIONS				
	No.	List Price Each	Amer. Std. HEAVY Nut (U.S.S.) Size Bolt	Amer. Std. Hex Head Cap Screw Diam. Screw	Amer. Std. LIGHT Nut (S.A.E.) Size Bolt	Amer. Std. REGULAR Nut; Size Bolt		Nominal Opening A	Diam. Drive End B	Diam. Nose C	Length Overall E	Depth Nominal Opening F
3/4	7-624	\$3.30	1/2	1/2	7/16	A	3/4	2	1- 7/16	2- 1/16	9/16
13/16	7-626	3.30	9/16	1/2	1/2	A	13/16	2	1- 1/2	2- 1/16	5/8
7/8	7-628	3.30	1/2	5/8	9/16	9/16	A	7/8	2	1-17/32	2- 1/16	21/32
15/16	7-630	3.30	9/16	5/8	A	15/16	2	1-19/32	2- 1/16	11/16
1	7-632	3.30	3/4	5/8	A	1	2	1- 3/4	2- 1/16	11/16
1- 1/16	7-634	3.30	5/8	3/4	A	1- 1/16	2	1- 3/4	2- 1/16	11/16
1- 1/8	7-636	3.30	7/8	3/4	A	1- 1/8	2	1-13/16	2- 3/16	13/16
1- 1/4	7-640	3.30	3/4	↑ (1)	7/8	A	1- 1/4	2	2-1/8	2- 3/16	13/16
1- 5/16	7-642	3.30	1	7/8	A	1- 5/16	2-1/8	2- 1/16	2- 3/16	13/16
1- 3/8	7-644	3.50	↑ (1-1/8)	B	1- 3/8	2-1/8	2- 1/8	2- 5/16	15/16
1- 7/16	7-646	3.65	7/8	1	B	1- 7/16	2-1/4	2- 1/4	2- 5/16	15/16
1- 1/2	7-648	3.85	1-1/8 ↑(1-1/4)	1	B	1- 1/2	2-1/4	2- 5/16	2- 5/16	15/16
1- 5/8	7-652	3.85	1	1-1/8	B	1- 5/8	2-1/4	2- 7/16	2- 7/16	1
1-11/16	7-654	4.30	1-1/4	1-1/8	B	1-11/16	2-1/4	2- 9/16	2- 7/16	1
1-13/16	7-658	4.65	1-1/8	1-1/4	B	1-13/16	2-1/4	2- 3/4	2- 9/16	1-1/8
1- 7/8	7-660	4.65	1-1/4	B	1- 7/8	2-1/4	2- 3/4	2- 9/16	1-1/8
2	7-664	5.30	1-1/4	1-3/8	B	2	2-1/4	3	2-11/16	1-1/4
2- 1/16	7-666	5.50	1-3/8	B	2- 1/16	2-1/4	3	2-11/16	1-1/4
2- 3/16	7-670	6.40	1-3/8	1-1/2	B	2- 3/16	2-1/4	3- 1/4	2-13/16	1-3/8
2- 1/4	7-672	6.50	1-1/2	B	2- 1/4	2-1/4	3- 1/4	2-13/16	1-3/8

† Old style cap screw—now obsolete.

For Retainer Pins and Neoprene Bands to fit above sockets and extensions see Page 11.

WILLIAMS


IMPACT "SUPERSOCKETS"

"8" SERIES


Standard Length Hexagon

1-1/2" Square Drive

Furnished with removable
snap-ring in drive end

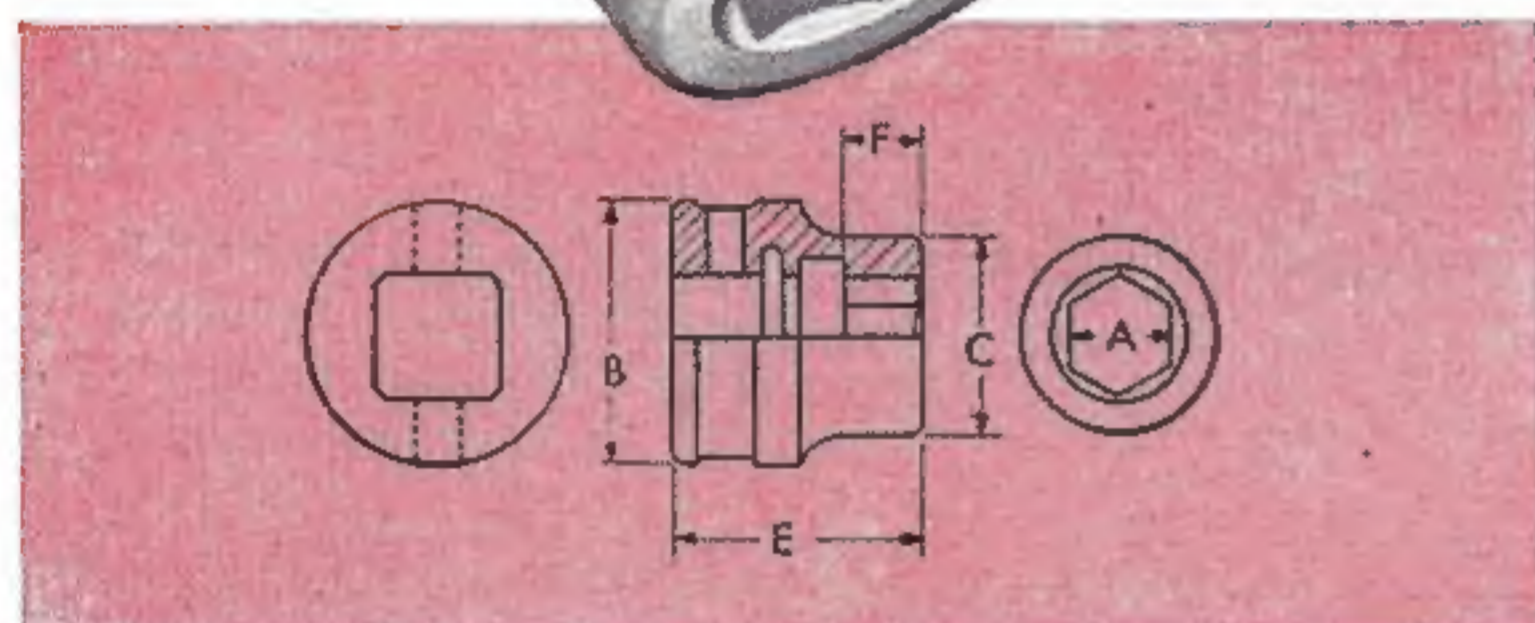

TYPE A

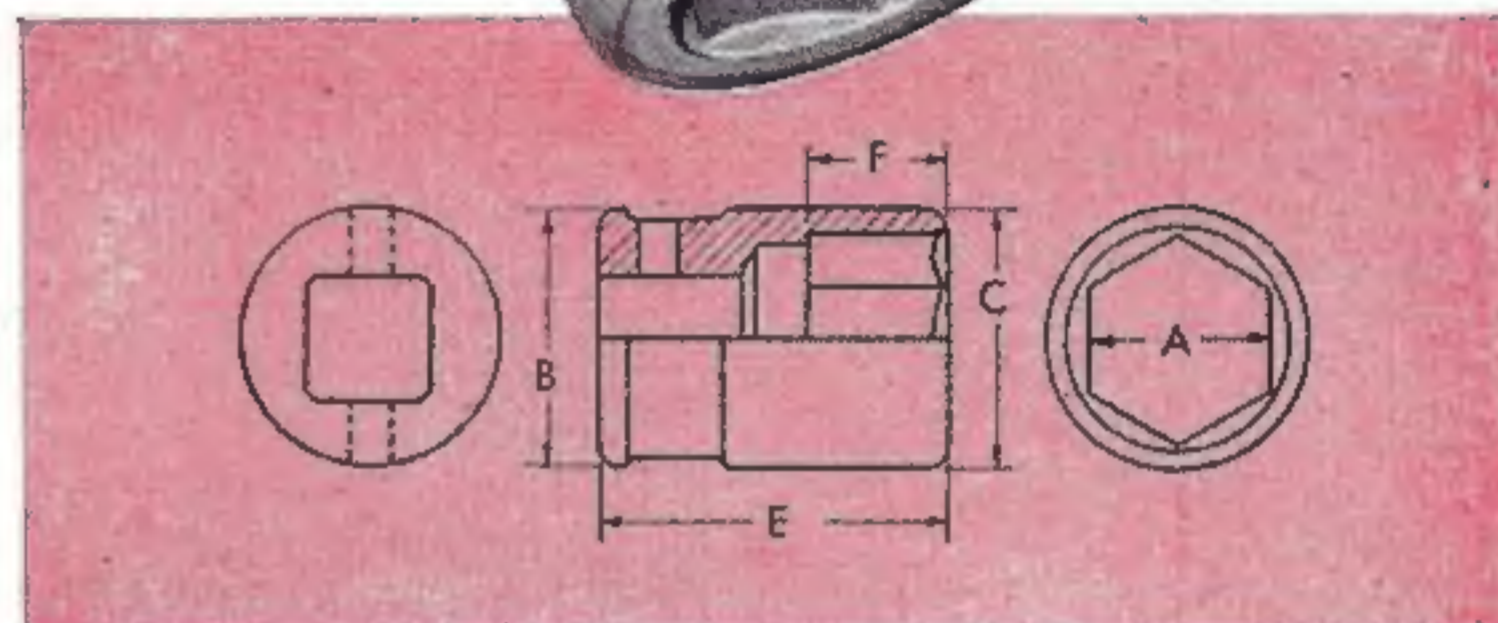

TYPE B



8-106



8-112

8-106 Extension Bar — 6" long — List Price, **\$15.00**

8-112 Extension Bar — 12" long — List Price, **\$18.00**

Nominal Opening	FOR HEX NUTS AND CAP SCREWS						Type	DIMENSIONS				
	No.	List Price Each	Amer. Std. HEAVY Nut (U.S.S.) Size Bolt	Amer. Std. Hex Head Cap Screw Diam. Screw	Amer. Std. LIGHT Nut (S.A.E.) Size Bolt	Amer. Std. REGULAR Nut; Size Bolt		Nominal Opening A	Diam. Drive End B	Diam. Nose C	Length Overall E	Depth Nominal Opening F
1- 5/16	8-642	\$9.50	1	7/8	A	1- 5/16	3-1/4	2-1/2	3-1/8	1
1- 3/8	8-644	9.50	† (1-1/8)	A	1- 3/8	3-1/4	2-3/4	3-1/8	1
1- 7/16	8-646	9.50	7/8	1	A	1- 7/16	3-1/4	2-3/4	3-1/8	1
1- 1/2	8-648	9.50	1-1/8†(1-1/4)	1	A	1- 1/2	3-1/4	2-7/8	3-1/8	1
1- 5/8	8-652	9.50	1	1-1/8	A	1- 5/8	3-1/4	3	3-1/8	1
1-11/16	8-654	9.50	1-1/4	1-1/8	A	1-11/16	3-1/4	3	3-1/8	1
1-13/16	8-658	10.45	1-1/8	A	1-13/16	3-1/4	3-1/8	3-1/4	1-1/8
1- 7/8	8-660	10.65	1-1/4	A	1- 7/8	3-1/4	3-1/8	3-1/4	1-1/8
2	8-664	11.45	1-1/4	1-3/8	B	2	3-1/4	3-1/4	3-3/4	1-1/4
2- 1/16	8-666	12.00	1-3/8	B	2- 1/16	3-1/4	3-1/2	3-7/8	1-1/4
2- 3/16	8-670	12.75	1-3/8	1-1/2	B	2- 3/16	3-1/4	3-1/2	3-7/8	1-1/4

† Old style cap screw—now obsolete.


For Retainer Pins and Neoprene Bands to fit above sockets and extensions see Page 11.

WILLIAMS

IMPACT

"SUPERSOCKETS"

"8" SERIES
Standard Length Hexagon
1-1/2" Square Drive
 Furnished with removable
 snap-ring in drive end.

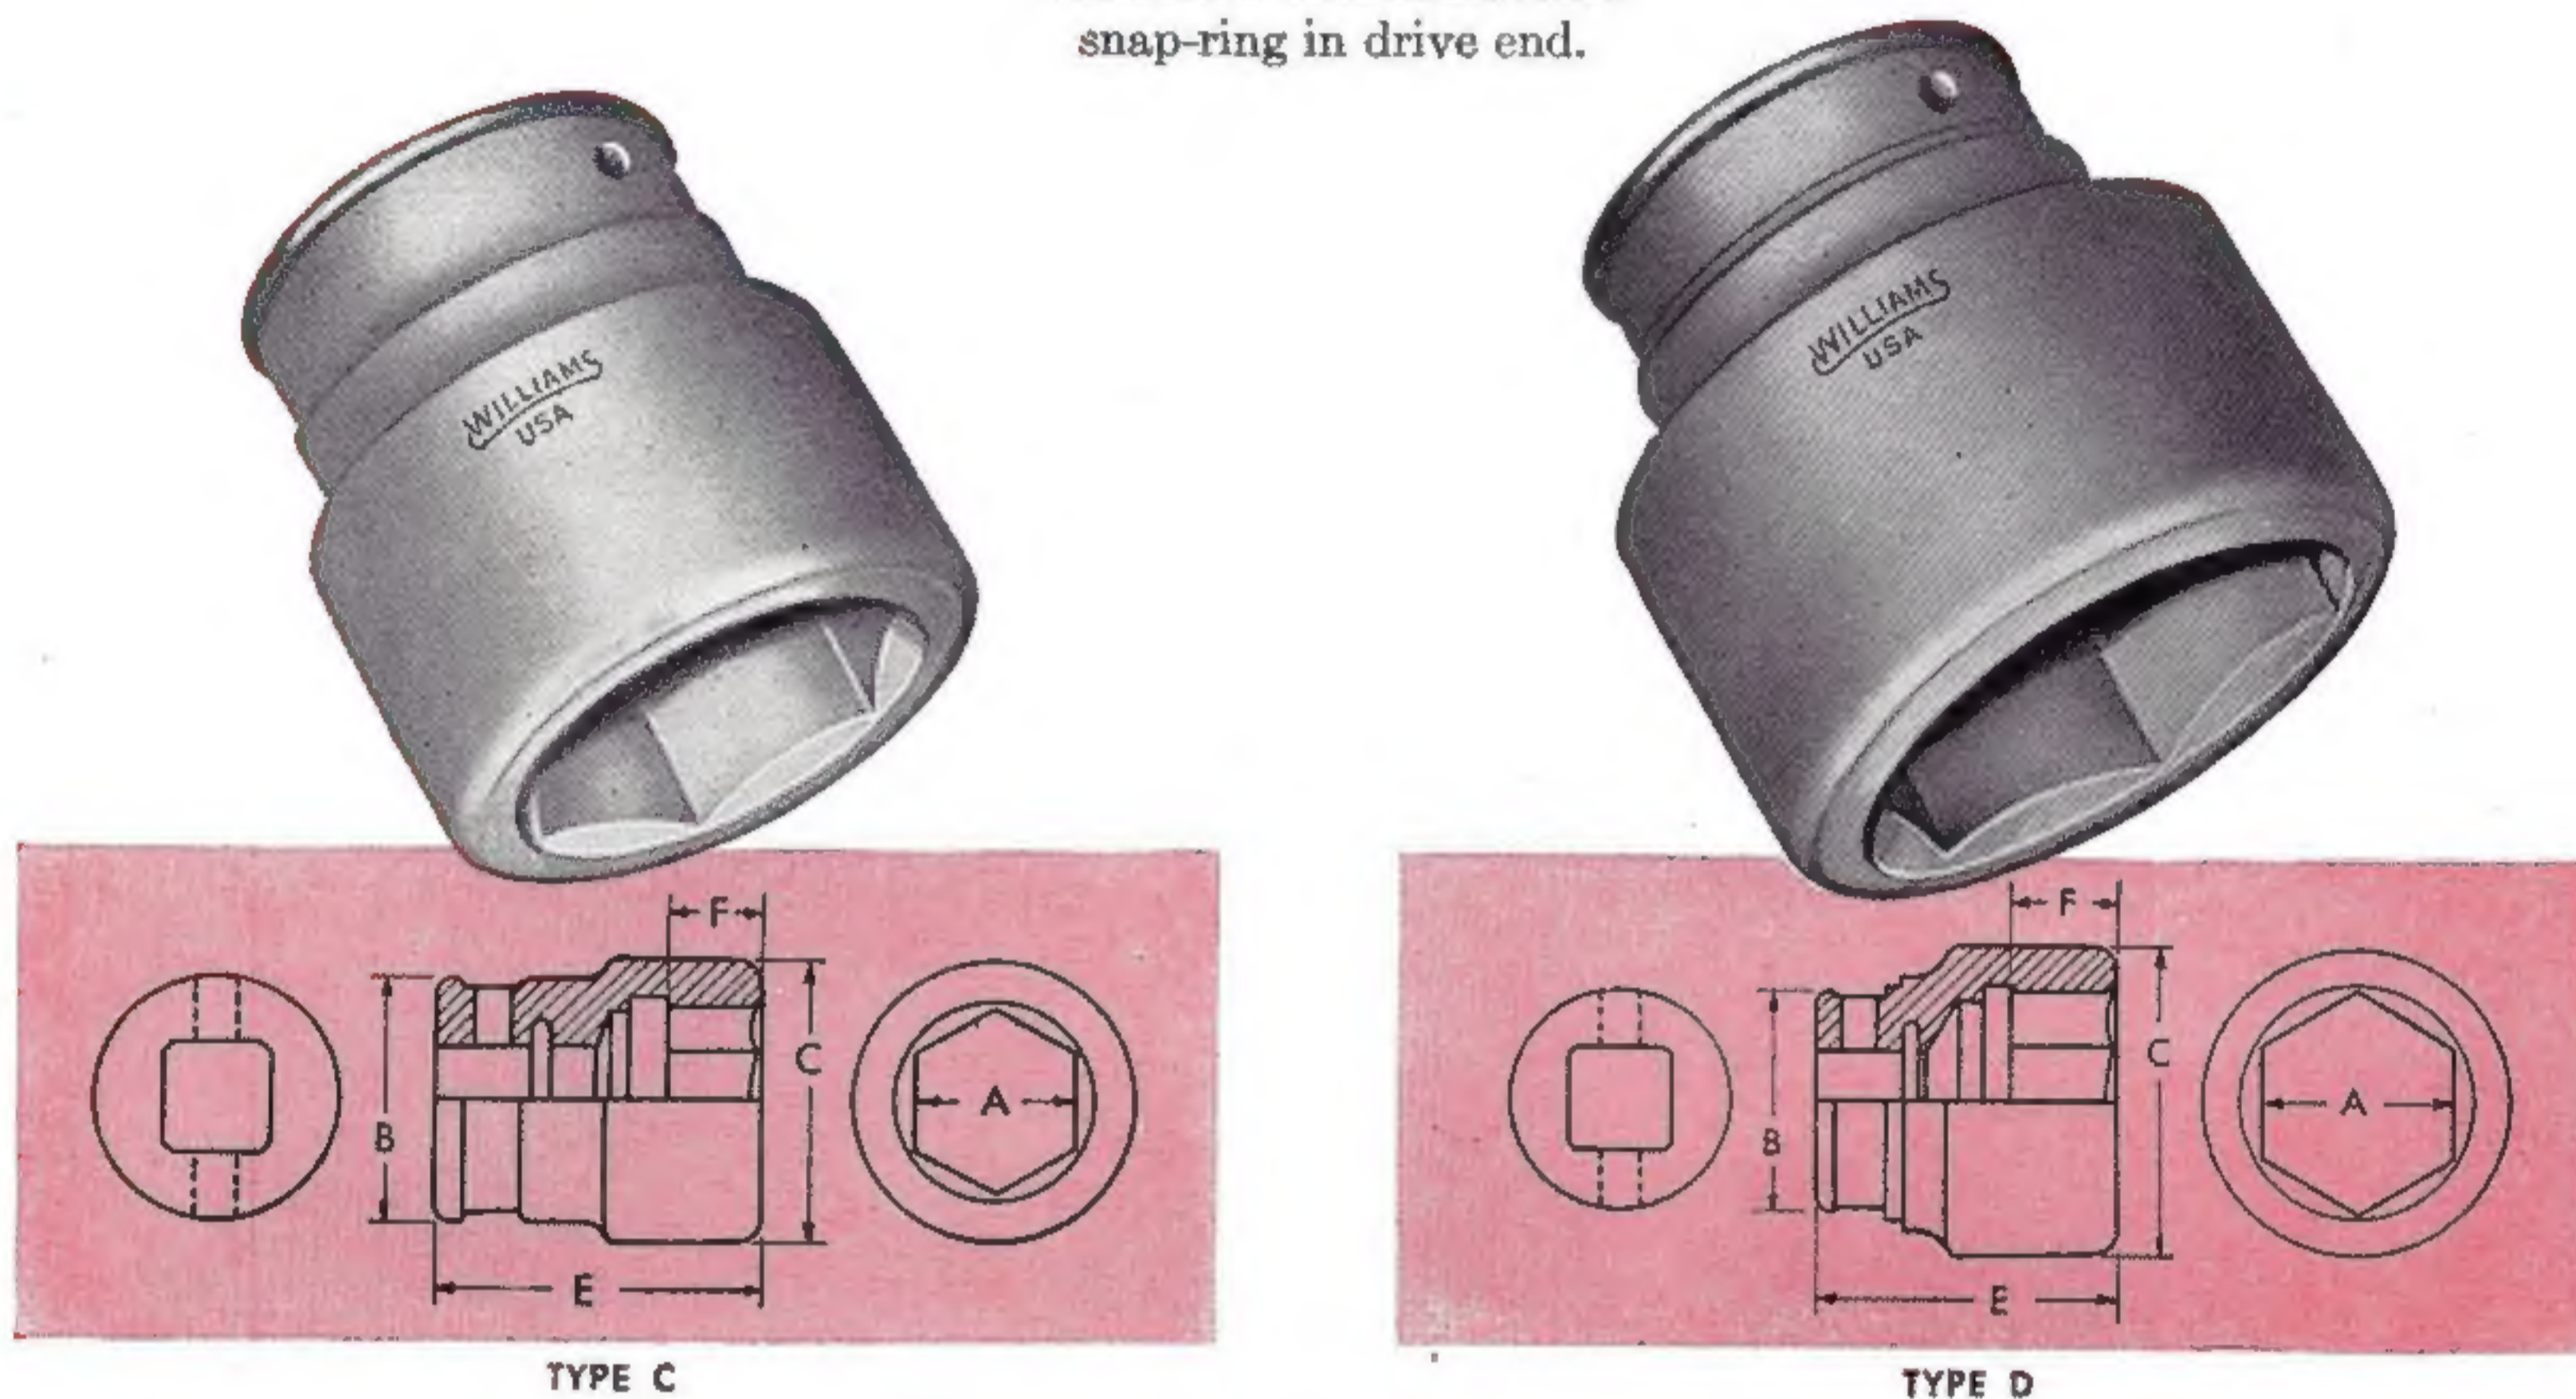

Types A and B sockets of this series and Extension Bars
 to fit sockets in table below are listed on page 9.

Nominal Opening	FOR HEX NUTS AND CAP SCREWS						Type	DIMENSIONS				
	No.	LIST PRICE, Each	Amer. Std. HEAVY Nut (U.S.S.) Size Bolt	Amer. Std. Hex Head Cap Screw Diam. Screw	Amer. Std. LIGHT Nut (S.A.E.) Size Bolt	Amer. Std. REGULAR Nut; Size Bolt		Nominal Opening A	Diam. Drive End B	Diam. Nose C	Length Overall E	Depth Nominal Opening F
2- 1/4	8-672	\$20.15	1-1/2	C	2-1/4	3-1/4	3-3/4	4	1-3/8
2- 3/8	8-676	21.00	1-1/2	C	2-3/8	3-1/4	3-7/8	4-1/8	1-3/8
2- 7/16	8-678	23.20	1-5/8	C	2-7/16	3-1/4	3-7/8	4-1/8	1-3/8
2- 9/16	8-682	25.45	1-5/8	D	2-9/16	3-1/4	4	4-1/4	1-9/16
2- 5/8	8-684	25.95	1-3/4	D	2-5/8	3-1/4	4-1/4	4-1/4	1-9/16
2- 3/4	8-688	26.35	1-3/4	D	2-3/4	3-1/4	4-1/4	4-3/8	1-9/16
2-15/16	8-694	29.45	1-7/8	D	2-5/16	3-1/4	4-1/2	4-1/2	1-5/8
3	8-696	31.10	2	D	3	3-1/4	4-1/2	4-5/8	1-5/8
3- 1/8	8-6100	35.30	2	D	3-1/8	3-1/4	4-3/4	4-5/8	1-3/4
3- 3/8	8-6108	42.25	2-1/4	D	3-3/8	3-1/4	5	4-5/8	1-3/4
3- 1/2	8-6112	46.95	2-1/4	D	3-1/2	3-1/4	5-1/8	4-5/8	1-3/4

For Retainer Pins and Neoprene Bands to fit above sockets and extensions see Page 11.

WILLIAMS

IMPACT "SUPERSOCKETS"


"4" thru "8" SERIES

1/2, 5/8, 3/4, 1 and 1-1/2" Square Drives

NEOPRENE BANDS and RETAINER PINS

Neoprene Bands are specially designed for resistance to oil and grease.

Retainer Pins are made of selected steel—oil finished

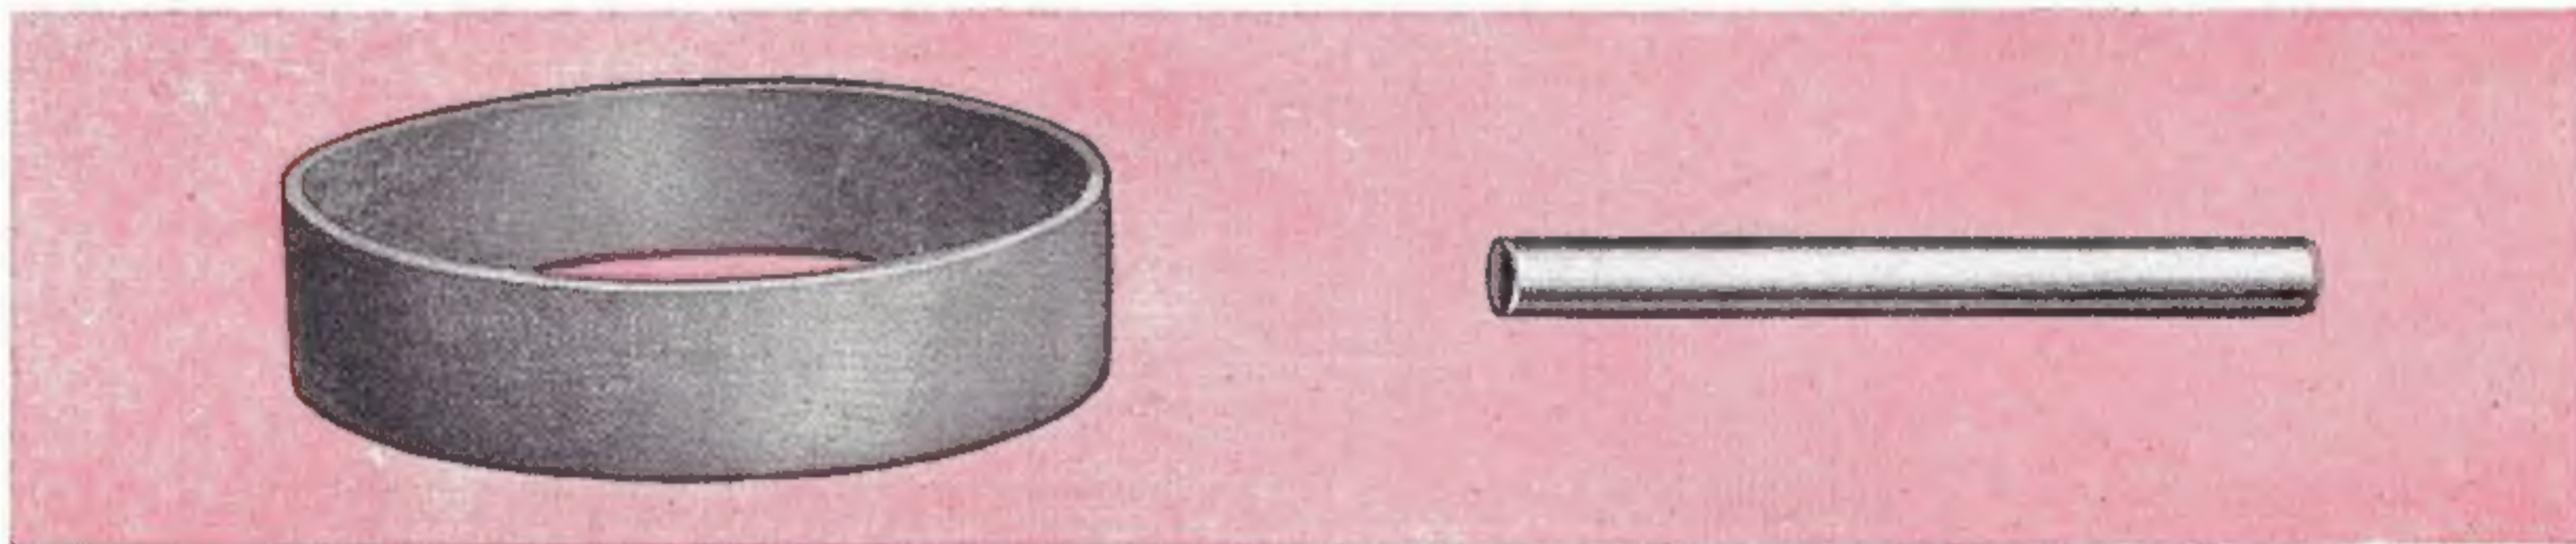


Neoprene Bands and Retainer Pins are packaged separately, 24 of each to a box

SPECIFICATIONS

Square Drive Size	Socket and Extension Nos.	NEOPRENE BANDS		RETAINER PINS		
		Type	Inside Diameter	Type	Dimensions	
					Diameter	Length
1/2"	4-612 thru 4-628 4-630 thru 4-640 4-105 & 4-110	A	7/8	A	3/16	7/8
		B	1-1/8	B	3/16	1-1/8
		A	7/8	A	3/16	7/8
5/8"	5-616 thru 5-630 5-632 thru 5-648 5-106 & 5-110	B	1-1/8	B	3/16	1-1/8
		C	1-3/8	B	3/16	1-1/8
		B	1-1/8	B	3/16	1-1/8
3/4"	6-618 thru 6-636 6-640 thru 6-654 6-107, 6-110, 6-113	C	1-3/8	B	3/16	1-1/8
		D	1-5/8	C	3/16	1-1/2
		C	1-3/8	C	3/16	1-1/2
1"	7-624 thru 7-672 7-106 & 7-112	E	1-7/8	D	3/16	1-7/8
		E	1-7/8	D	3/16	1-7/8
1-1/2"	8-642 thru 8-6112 8-106 & 8-112	F	2-7/8	E	1/4	2-7/8
		F	2-7/8	E	1/4	2-7/8

PRICES

NEOPRENE BANDS		RETAINER PINS	
Type	List Price Each	Type	List Price Each
A	\$.07	A	\$.06
B	.07	B	.06
C	.07	C	.07
D	.08	D	.07
E	.08	E	.07
F	.16		.08

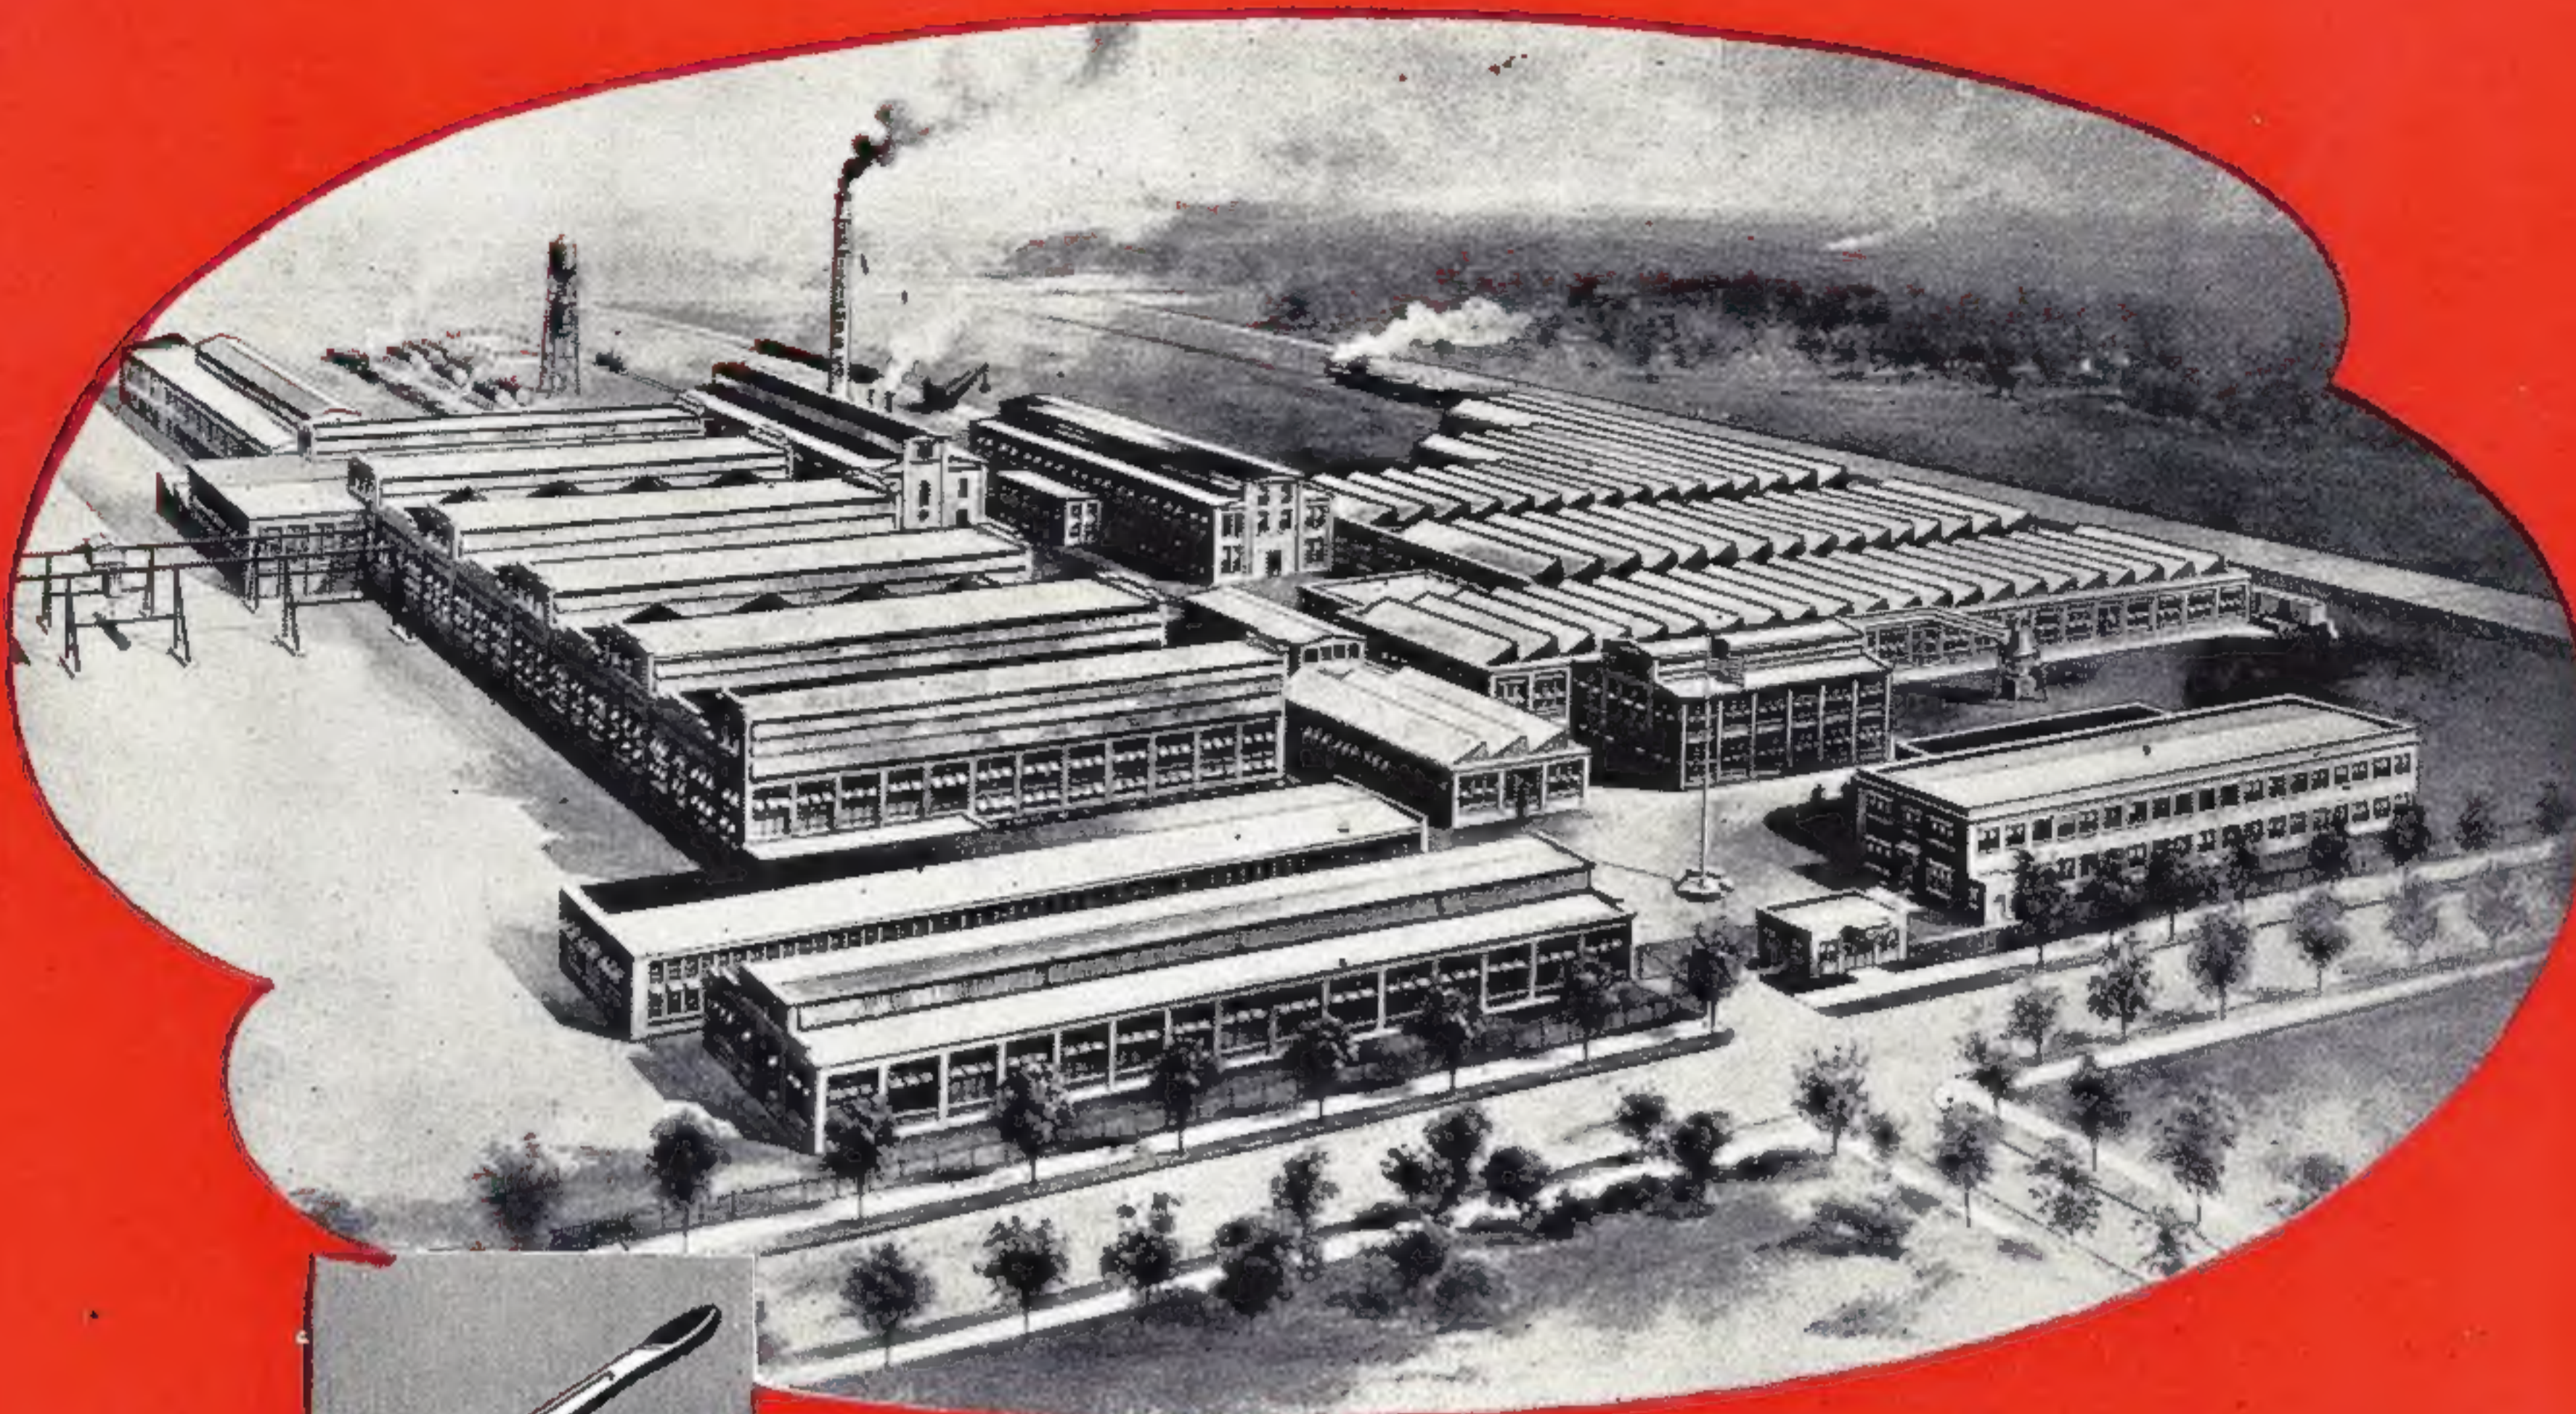

CARBON AND ALLOY STEEL WRENCHES IN ALL TYPES • DETACHABLE SOCKETS AND PARTS • TOOL SETS • TOOL HOLDERS • LATHE DOGS • "C" CLAMPS • CHAIN PIPE TONGS AND VISES • HOIST HOOKS • EYE BOLTS • ROD ENDS • THUMB NUTS AND SCREWS • SCREW DRIVERS • PLIERS • PUNCHES AND CHISELS • FLANGE-JACKS • SOFT FACED "NUPLAFLEX" TIPPED HAMMERS • CRANK AND BALANCE HANDLES

We guarantee all our products to be free from imperfections of workmanship and materials.

J. H. WILLIAMS & CO.
400 Vulcan St. Buffalo 7, N. Y.

District Sales Offices

225 Lafayette Street
117 N. Jefferson Street
2266 E. 38th Street

New York 12, N. Y.
Chicago 6, Ill.
Los Angeles 11, Calif.

POSTED MAY 2022

B.D. SZAFRANSKI

ELMA NY USA

**PLEASE DO NOT REPRINT
OR REPUBLISH FOR PROFIT.**

J. H. WILLIAMS & CO.

WILLIAMS

BUFFALO, NEW YORK

USER PRICE SHEET

IMPACT "SUPERSOCKETS"

1/4", 3/8", 1/2", and 5/8" Square Drive Sizes

STANDARD LENGTH HEXAGONS AND EXTENSIONS

Number	Nominal Opening	Package Quantity	List and User Price	User Pkg. Qty. Disc.	Number	Nominal Opening	Package Quantity	List and User Price	User Pkg. Qty. Disc.	
1/4" DRIVE "SUPERSOCKETS"					1/2" DRIVE "SUPERSOCKETS"					
0-606	3/16"	12	\$.45	25	4-622	11/16"	12	\$.70	25	
0-607	7/32"	12	.45		4-624	3/4"	12	.75		
0-608	1/4"	12	.45		4-625	25/32"	12	.80		
0-609	9/32"	12	.45		4-626	13/16"	12	.85		
0-610	5/16"	12	.45		4-628	7/8"	12	.85		
0-611	11/32"	12	.45		4-630	15/16"	12	.95		
0-612	3/8"	12	.45		4-632	1"	6	1.00		
0-614	7/16"	12	.45		4-634	1-1/16"	6	1.10		
1/4" DRIVE EXTENSIONS					1/2" DRIVE EXTENSIONS					
0-102	2" long	6	1.00	25	4-105	5" long	6	1.40	25	
0-106	6" long	6	1.20		4-110	10" long	6	1.60		
3/8" DRIVE "SUPERSOCKETS"					5/8" DRIVE "SUPERSOCKETS"					
2-610	5/16"	12	.55	25	5-616	1/2"	12	1.00	25	
2-611	11/32"	12	.55		5-618	9/16"	12	1.00		
2-612	3/8"	12	.55		5-619	19/32"	12	1.00		
2-614	7/16"	12	.55		5-620	5/8"	12	1.00		
2-616	1/2"	12	.55		5-622	11/16"	12	1.00		
2-618	9/16"	12	.55		5-624	3/4"	12	1.00		
2-619	19/32"	12	.60		5-625	25/32"	12	1.00		
2-620	5/8"	12	.60		5-626	13/16"	12	1.00		
2-622	11/16"	12	.60		5-628	7/8"	12	1.00		
2-624	3/4"	12	.60		5-630	15/16"	6	1.15		
3/8" DRIVE EXTENSIONS					5/8" DRIVE EXTENSIONS					
2-103	3" long	6	1.10	25	5-632	1"	6	1.25	25	
2-106	6" long	6	1.30		5-634	1-1/16"	6	1.35		
1/2" DRIVE "SUPERSOCKETS"					5/8" DRIVE EXTENSIONS					
4-612	3/8"	12	.65	25	5-106	6" long	3	2.00		25
4-614	7/16"	12	.65		5-110	10" long	3	2.50		
4-616	1/2"	12	.65							
4-618	9/16"	12	.65							
4-619	19/32"	12	.65							
4-620	5/8"	12	.65							

This Price and Discount Sheet on Impact "Supersockets" supersedes all previous price lists, including Schedule of Users Prices shown in Impact "Supersocket" Catalog A-100, 6-48

3/4", 1", and 1-1/2" Square Drive Sizes
STANDARD LENGTH HEXAGONS AND EXTENSIONS

Number	Nominal Opening	Package Quantity	List Price	User Discount	Number	Nominal Opening	Package Quantity	List Price	User Discount
3/4" DRIVE "SUPERSOCKETS"					1" DRIVE "SUPERSOCKETS"				
6-618	9/16"	\$2.30	25	7-652	1- 5/8"	\$3.85	25
6-619	19/32"	2.30		7-654	1-11/16"	4.30	
6-620	5/8"	2.30		7-658	1-13/16"	4.65	
6-622	11/16"	2.30		7-660	1- 7/8"	4.65	
6-624	3/4"	2.30		7-664	2"	5.30	
6-625	25/32"	2.30		7-666	2- 1/16"	5.50	
6-626	13/16"	2.30		7-670	2- 3/16"	6.40	
6-628	7/8"	2.30		7-672	2- 1/4"	6.50	
6-630	15/16"	2.40		1" DRIVE EXTENSIONS				
6-632	1"	2.45		7-106	6" long	8.00	25
6-634	1-1/16"	2.55		7-112	12" long	10.00	
6-636	1-1/8"	2.60		1-1/2" DRIVE "SUPERSOCKETS"				
6-640	1-1/4"	3.00		8-642	1-5/16"	9.50	25
6-642	1-5/16"	3.40		8-644	1-3/8"	9.50	
6-644	1-3/8"	3.60		8-646	1- 7/16"	9.50	
6-646	1-7/16"	3.85		8-648	1-1/2"	9.50	
6-648	1-1/2"	4.00		8-652	1- 5/8"	9.50	
6-652	1-5/8"	4.25		8-654	1-11/16"	9.50	
6-654	1-11/16"	4.40		8-658	1-13/16"	10.45	
3/4" DRIVE EXTENSIONS					8-660	1- 7/8"	10.65	
6-107	7" long	5.00	25	8-664	2"	11.45	
6-110	10" long	6.00		8-666	2- 1/16"	12.00	
6-113	13" long	6.50		8-670	2- 3/16"	12.75	
1" DRIVE "SUPERSOCKETS"					8-672	2- 1/4"	20.15	
7-624	3/4"	3.30	25	8-676	2- 3/8"	21.00	
7-626	13/16"	3.30		8-678	2- 7/16"	23.20	
7-628	7/8"	3.30		8-682	2- 9/16"	25.45	
7-630	15/16"	3.30		8-684	2- 5/8"	25.95	
7-632	1"	3.30		8-688	2- 3/4"	26.35	
7-634	1-1/16"	3.30		8-694	2-15/16"	29.45	
7-636	1-1/8"	3.30		8-696	3"	31.10	
7-640	1-1/4"	3.30		8-6100	3- 1/8"	35.30	
7-642	1-5/16"	3.30		8-6108	3- 3/8"	42.25	
7-644	1-3/8"	3.50		8-6112	3- 1/2"	46.95	
7-646	1-7/16"	3.65		1-1/2" DRIVE EXTENSIONS				
7-648	1- 1/2"	3.85		8-106	6" long	15.00	25
					8-112	12" long	18.00	

Factory Shipment to User 25 or more assorted sockets
3/4", 1", 1-1/2" square drive sizes.....25-25%

PRICES FOR BANDS AND PINS

NEOPRENE BANDS				RETAINER PINS			
Type	Package Quantity	List and User Price	User Package Qty. Disc	Type	Package Quantity	List and User Price	User Package Qty. Disc.
A	24	\$.07	25	A	24	\$.06	25
B	24	.07		B	24	.06	
C	24	.07		C	24	.07	
D	24	.08		D	24	.07	
E	24	.08		E	24	.08	
F	24	.16					

Chart showing Band and Pin Requirements for various sockets can
be found on page 11 of Impact "Supersocket" Catalog A-100.